

STARLINK



SL-POE106GW

1 Port Gigabit Hi-PoE Injector


Introduction

SL-POE106GW is a single-port and high power PoE injector. It provides 55VDC, 60W power for remote PD, and support 10/100/1000Mbps.


It provides power for IEEE802.3af/at PoE standard terminal equipment, such as wireless AP, network camera and VoIP phone.

SL-POE106GW works well with input voltage 100-240VAC. It is connected to network equipment through Cat5e cable. The effective distance is 100 meters, and it can work longer to 400 meters with adding PoE extender.

Work Functional Picture

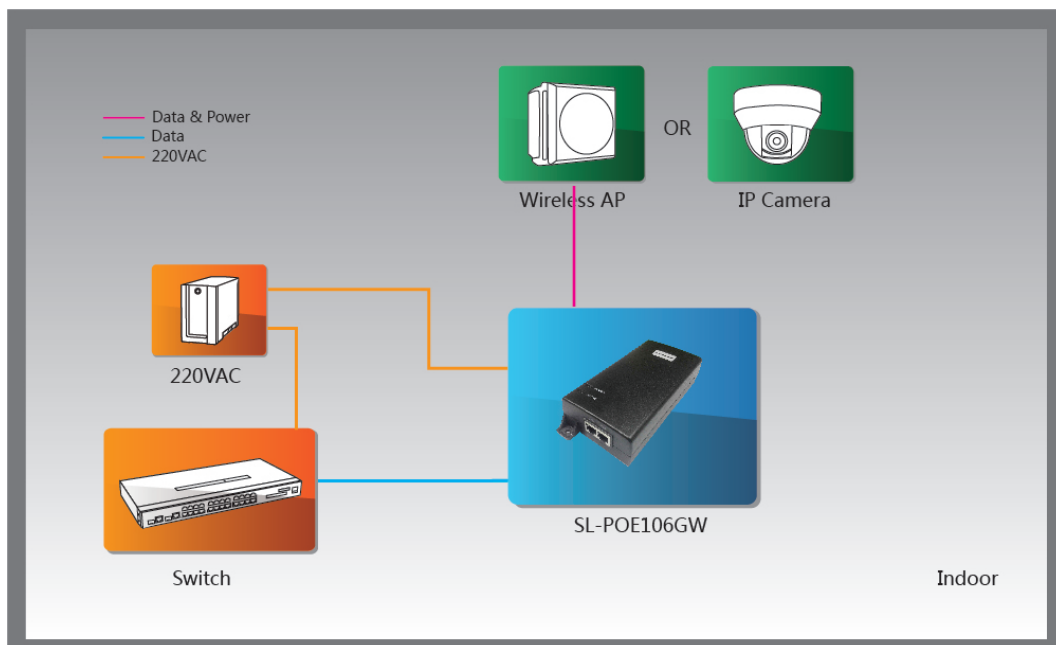

Product Interface Picture

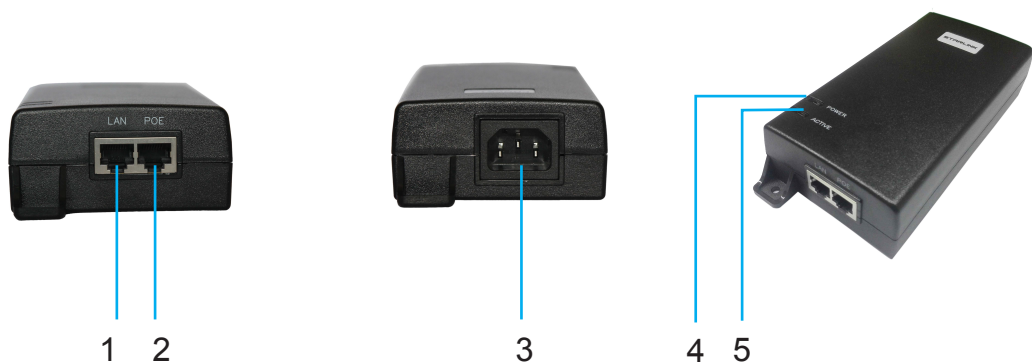

1. Data Input Port
2. PoE Power Output Port
3. AC Power Input Port

4. AC Power Instruction Light
5. Load Activations Instruction



Key Features

- AT chip is inside, detect PD before provide power
- Output voltage: 55V/1.1A, 60W
- Power Pins :1.2.3.4.5.6.7.8
- Provide 10/100/1000Mbps
- Compact design, high power, lower cost
- Support terminal equipment with IEEE802.3af/IEEE802.3at

Specification


Standards

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- Support terminal equipment with IEEE802.3af/IEEE802.3at
- RoHS Compliant
- WEEE Compliant, CE/FCC
- FCC Part 15, Class B
- EN 55022 Class B, EN 55024
- MTBF: 100,000 hours.@25°C


PoE Power Output

- Port No: 1
- Power Pin: 4/5(+), 7/8(-) & 3/6(+), 1/2(-)
- Transmission Rate: 10/100/1000Mbps
- Output Voltage: 55V
- Output current: 1.1A
- Input AC voltage: 100-240VAC
- Input AC current: 1.5A@ 100-240VAC
- AC Hz: 50-60Hz

Installation Structure



(1) Desktop Placement Installation




(2) Wall Fixed Installation

Ordering Info: SL-POE106GW 55VDC Output/60W/1000M/Active

Product Packing: SL-POE106GW x 1
Product manual x 1
Power Cord x 1

Outline Drawing

Unit :mm

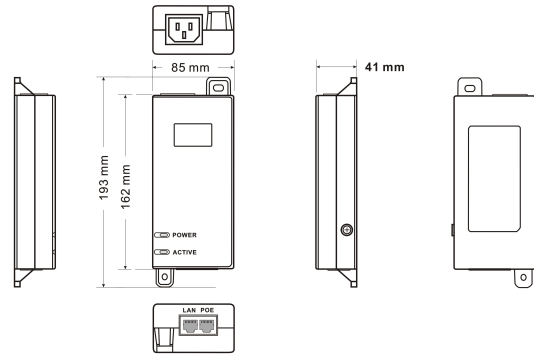

Dimension & Weight

- Dimension: 193mm X 85mm X 41mm
- Weight: 380g

Environmental & conditions

- Operating Temperature: -5°C to +45°C
- Operating Height: -304.8 meters to 3048 meters
- Operating Humidity: Maximum 90%, Non-condensation

AC Input Surge Protection

- 2KV