


STARLINK



SL-POE30GT

Gigabit Active 802.3at PoE Midspan

Product Overview

SL-POE30GT is an indoor rated active PoE Injector, it is specially designed for complex backhaul and networking applications. It provides 52Vdc, 0.58A power for remote PDs over 2 pairs output. It supports both 10/100 Base-T and Gigabit device.


It works for 30W PoE PDs, such as wireless APs, Wifi routers, Network cameras, IP Phones, Microwave Radio and other power Ethernet terminals. It fully complies to IEEE802.3af/at PoE standard.

Enclosed in an IP40 fire retardant plastic case. It works with a wide input voltage of 100-240 VAC, 50 or 60 Hz. It has detection chip inside, which will detect and classify PD before powering it. It will not provide power until a standard compliant PD is detected.

The effective distance is 100 meters over Cat5e/Cat6 cables. It is small in size but high performance



Product Profile

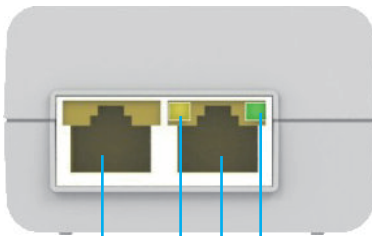

1 2 3 4


1. LAN: Data Input Port
2. Power Indicator
3. PoE: Data & Power Output Port



5

4. PoE Load Indicator
5. AC Power Input

Product Working Diagram

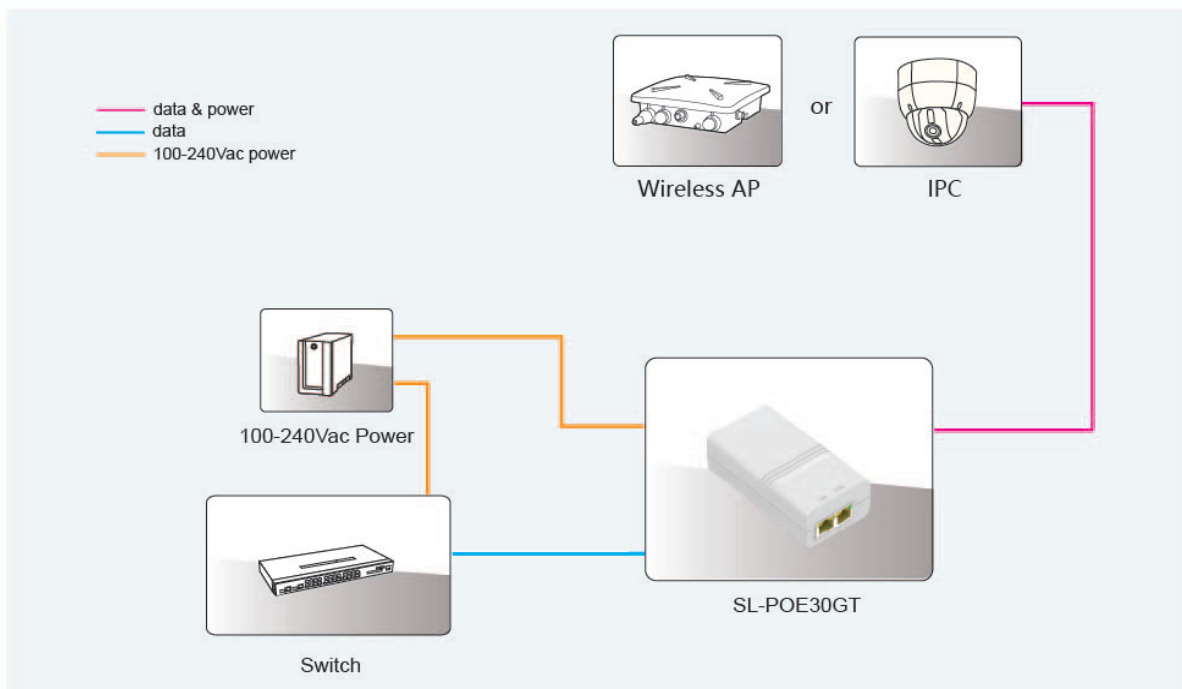

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- Full compliant with IEEE802.3af/at PoE standard
- RoHS Compliance
- WEEE Compliance

Input & Output

- Input :100-240Vac 1.0A 50/60Hz
- Output: 52Vdc 580mA
- Power Pins: 4/5(+), 7/8(-)
- Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: 0°C to 40°C
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -20°C to 70°C
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 2000meters

AC Surge Protection

- Line-Earth 1.2/50us (8/20us): 2KV
- Line-Line 1.2/50us (8/20us): 1KV

Mechanical Characteristics

- Case: Plastic
- Color: White
- IP Rated: IP40
- Size: 85mm X 46mm X 30mm
- Weight: 185g

Safety Approvals

- CE
- FCC

EMI

- FCC CFR47 Part 15, EN55024, EN55032

EMS


- IEC61000-4-2(ESD) $\pm 6kV$ (contact), $\pm 8kV$ (air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: $\pm 2kV$; Data Port: $\pm 1kV$
- IEC61000-4-5(Surge) Power Port: $\pm 1kV/DM$, $\pm 2kV/CM$
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

LED Indicator

- Power Indicator : Yellow
- PoE Load Indicator : Green

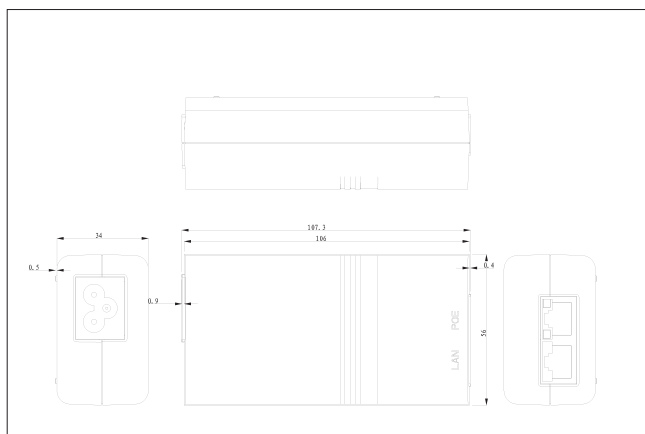


Order Info. SL-POE30GT

52Vdc/0.58A/1000Mbps/(4,5+,7,8-)/Active


Packing. SL-POE30GT
Power Cord x 1
Manual x 1

— data & power
— data
— 100-240Vac power



Wireless AP

or



IPC



100-240Vac Power



Switch



SL-POE30GT

